

GRAY



JALECO





PEEK-A-BOO PARTS LIST

QUANTITY	PART DESCRIPTION
1	PEEK-A-BOO PCB
1	ROTARY CONTROLLER
1	JAMMA ADAPTOR
1	CONTROLLER HARNESS
4	PUSH BUTTONS
1	INSTRUCTION STICKER
1	MARQUEE
2	SIDE PANEL DECALS
1	CONTROL PANEL OVERLAY
1	MANUAL

* IMPORTANT *

PEEK-A-BOO PCB IS **NOT** DIRECTLY JAMMA COMPATIBLE. THE JAMMA ADAPTOR HARNESS MUST BE USED WHEN PLUGGING PCB INTO A JAMMA EQUIPPED CABINET.

INSTALLING JAMMA ADAPTOR

TO INSTALL THE ADAPTOR ALIGN THE SLOT ON THE EDGE OF THE PCB WITH KEY OF THE 44 PIN CONNECTOR. THEN PLUG THE PCB INTO THE 44 PIN CONNECTOR OF THE ADAPTOR. NEXT, ALIGN THE SLOT ON THE JOINT PCB OF THE ADAPTOR WITH THE KEY OF THE JAMMA CONNECTOR AND PLUG IN THE JOINT PCB.

CONNECTING THE ROTARY CONTROLLER

ATTACH THE CONTROLLER HARNESS (6 PIN CONNECTOR WITH 3 WIRES) TO THE POTENTIOMETER OF THE CONTROLLER IN THE FOLLOWING MANNER:

- (CN1-E) RED WIRE TO PIN 1 OF POTENTIOMETER.
- (CN1-6) YELLOW WIRE TO PIN 2 OF POTENTIOMETER.
- (CN1-C) BLACK WIRE TO PIN 3 OF POTENTIOMETER.

SOLDER EACH WIRE TO THE POTENTIOMETER AND COVER THE CONNECTIONS WITH ELECTRICAL TAPE.

CONNECTING THE SPEAKERS

TO CONNECT SPEAKERS TO THE JAMMA ADAPTOR USE AMP CAP HOUSING #1-480703-0 WITH AMP PIN CONTACTS #350690-1 AND ATTACH TO YOUR CABINETS EXISTING SPEAKER WIRES. SEE WIRING DIAGRAM FOR VARIOUS SPEAKER CONFIGURATIONS.

Peek a Boo

• DIP SW. #1

DIP - 1			(No.)	1	2	3	4	5	6	7	8
COIN CHUTE 1	1 Coin	1Credit	OFF	OFF	OFF						
	1 Coin	2Credits	ON	OFF	OFF						
	1 Coin	3Credits	OFF	ON	OFF						
	1 Coin	4Credits	ON	ON	OFF						
	2 Coins	1Credit	OFF	OFF	ON						
	3 Coins	1Credit	ON	OFF	ON						
	4 Coins	1Credit	OFF	ON	ON						
	FREE PLAY		ON	ON	ON						
COIN CHUTE 2	1 Coin	1Credit				OFF	OFF	OFF			
	1 Coin	2Credits				ON	OFF	OFF			
	1 Coin	3Credits				OFF	ON	OFF			
	1 Coin	4Credits				ON	ON	OFF			
	2 Coins	1Credit				OFF	OFF	ON			
	3 Coins	1Credit				ON	OFF	ON			
	4 Coins	1Credit				OFF	ON	ON			
	FREE PLAY					ON	ON	ON			
ADVERTISE SOUND		ON								OFF	
		OFF								ON	
FLIP FLOP		Reverse								OFF	
										ON	

• DIP SW. #2

DIP - 2			(No.)	1	2	3	4	5	6	7	8
DIFFICULTY LEVEL	Normal		OFF	OFF							
	Hard		ON	OFF							
	Very Hard		OFF	ON							
	Easy		ON	ON							
TEST MODE	Yes				OFF						
					ON						
CONTROLLER TYPE	Potentiometer					OFF					
	Joystick					ON					
MODEL FEATURE	Male & Female Models						OFF	OFF			
	Male Models Eliminated						ON	OFF			
	Nudity Eliminated						OFF	ON			
	All Models Eliminated						ON	ON			
CABINET TYPE	Upright									OFF	
	Table									ON	
* NUMBER OF CONTROLLER	One										OFF
	Two										ON

* If a single player cabinet is used, the control panel should be fitted with one controller. If a 2-player upright cabinet is used, the control panel may be fitted with either one or two controllers so that 2 players can play by turns without changing the position in the latter case.

2. PB-92127A P.C.B.カートリッジコネクタCN1(44P)端子表

例) CR7E-44DA-3.96E(HIROSE)・・・3.96mmピッチ

PARTS SIDE

SOLDER SIDE




SIGNAL	Pin No	SIGNAL
DC12V	1 A	DC12V
GND	2 B	GND
GND	3 C	VR-1(GND)
DC5V	4 D	DC5V
DC5V	5 E	VR-3(DC5V)
PLAYER1 VR-2	6 F	PLAYER2 VR-2
KEY溝	7 H	KEY溝
SPEAKER(+)	8 J	SPEAKER(-)
COIN1-METER	9 K	COIN2-METER
STAGE CLEAR OUT	10 L	(TICKET NC.)
(TICKET COMMON)	11 M	(TICKET NO.)
TV RED	12 N	TV GREEN
TV BLUE	13 P	TV SYNC
TV GND	14 R	***** **
TEST SW	15 S	SERVICE SW
COIN1 SW	16 T	COIN2 SW
GRAY 1P START SW	17 U	2P START SW
1P SHOT1 SW	18 V	2P SHOT1 SW
1P LEFT SW	19 W	2P LEFT SW
1P RIGHT SW	20 X	2P RIGHT SW
GND	21 Y	GND
GND	22 Z	GND



CRZE-44DA-3 .96E
(H1ROSE)

JOINT P.C.B.
MI-1000 (JAMMA)

JAMMA

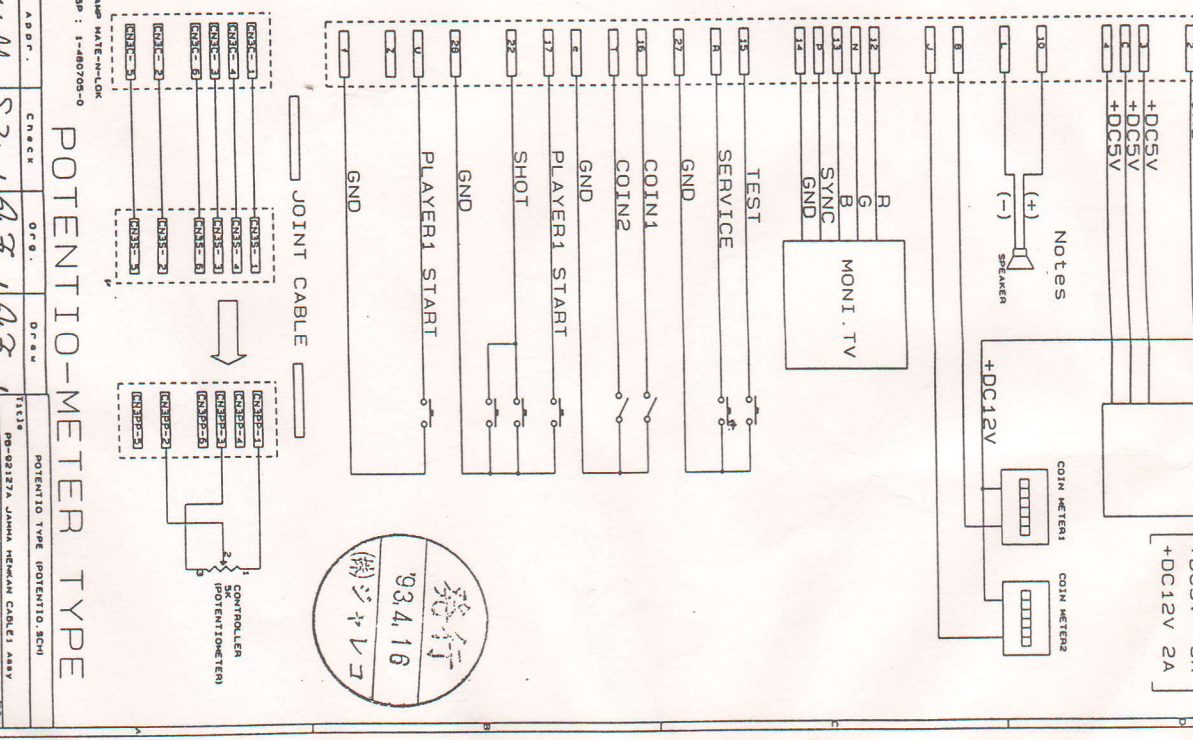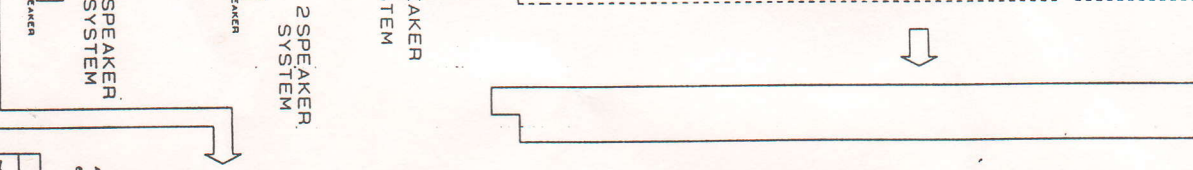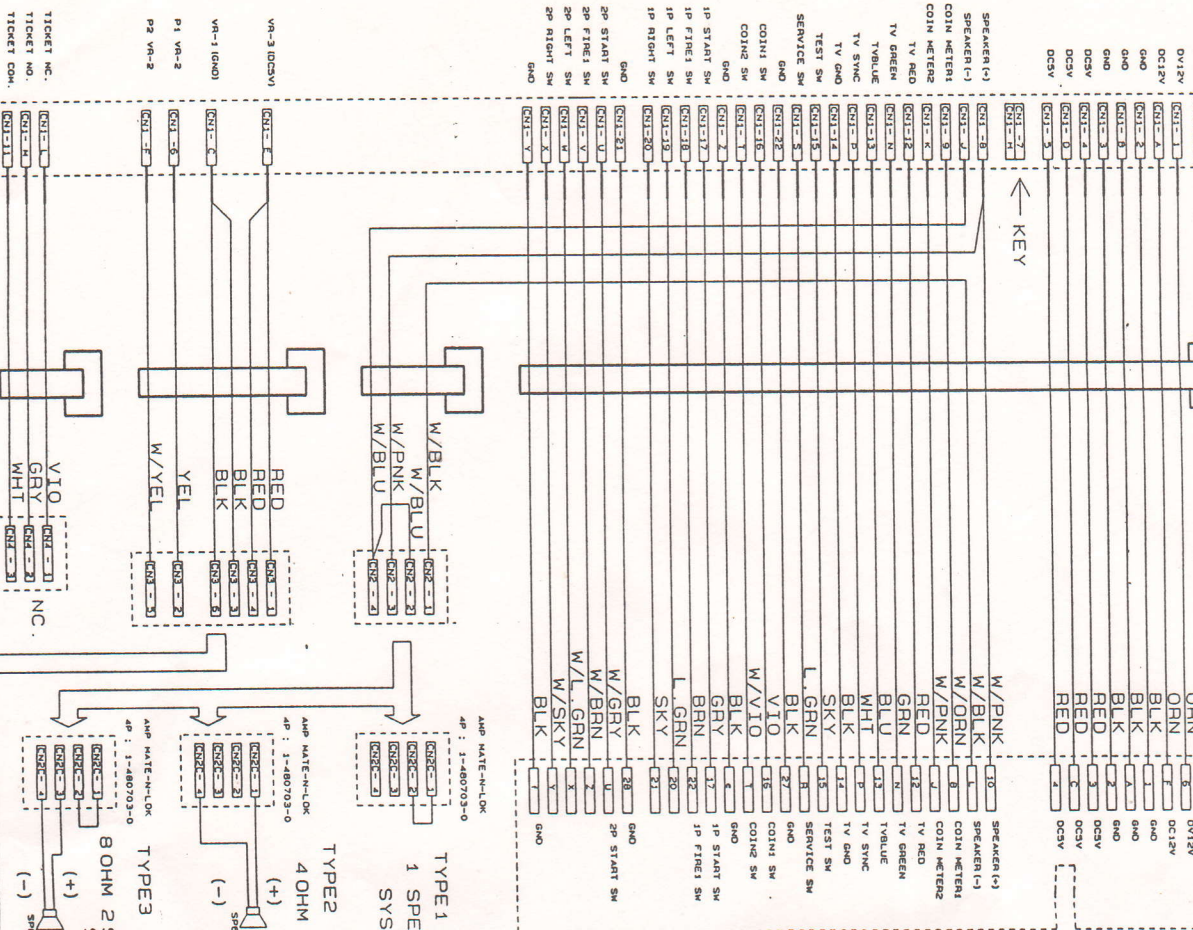

POTENTIO-METER TYPE

ABDR. CNECR ORB. ORB. POTENTIO TYPE (POTENTIO-SCN)

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

1980-03-27A JAMMA MEKAN CABLES ASBY

EF-80-30108-0

REV

934.16
備沙カレコ

